

WIDE LED L


Pitch between bars **100mm**

Power **60W/m²**

luminous flux **100 L/W**

Distance
curtain-fabric **32-200mm**

Rigid LED bars with aluminum backing, interconnected through two power cables.

This “curtain-style” system ensures quick and easy installation.

Features:

The polycarbonate lenses protect the chips from impacts and allow optimal light diffusion.

The bars are designed to be cut every 2 LEDs; it is also possible to cut off the last LED at the ends of the bar.

All versions are PWM dimmable.

Wide LED are available in 6- and 12-LED versions.

Other configurations are available on request.

The spacing between bars is 100 mm.

Designed to be installed directly on the back of the panel.

Optimal light diffusion is achieved with a distance between the “curtain” and the printed fabric (front sheet) ranging from 32 mm to 200 mm.

This “curtain-style” system is used to backlight ceilings, walls (including large ones), light box, single-sided panels and totems, desks and promotional islands, signs.

Available in cold white, neutral white, and warm white.

GENERAL FEATURES



DIMMING
0-100%



APPLICATION
Indoor





DOUBLE-SIDED TAPE
Present



WATERPROOFING
IP20

This Wide LED model is not compatible with other types.

WIDELED	Item code	Color temperature	Power	N° of Leds per bar	Lumen/Watt	Voltage	Dimension (cm)	Pitch (cm)	Pack
L	116058	Cold	3W	6	≈ 100	24V	48 x 1,5	10	30 bars
L	116050	Neutral	3W	6	≈ 100	24V	48 x 1,5	10	30 bars
L	116108	Warm	3W	6	≈ 100	24V	48 x 1,5	10	30 bars
L	116059	Cold	6W	12	≈ 100	24V	96 x 1,5	10	30 bars
L	116052	Neutral	6W	12	≈ 100	24V	96 x 1,5	10	30 bars
L	116084	Warm	6W	12	≈ 100	24V	96 x 1,5	10	30 bars

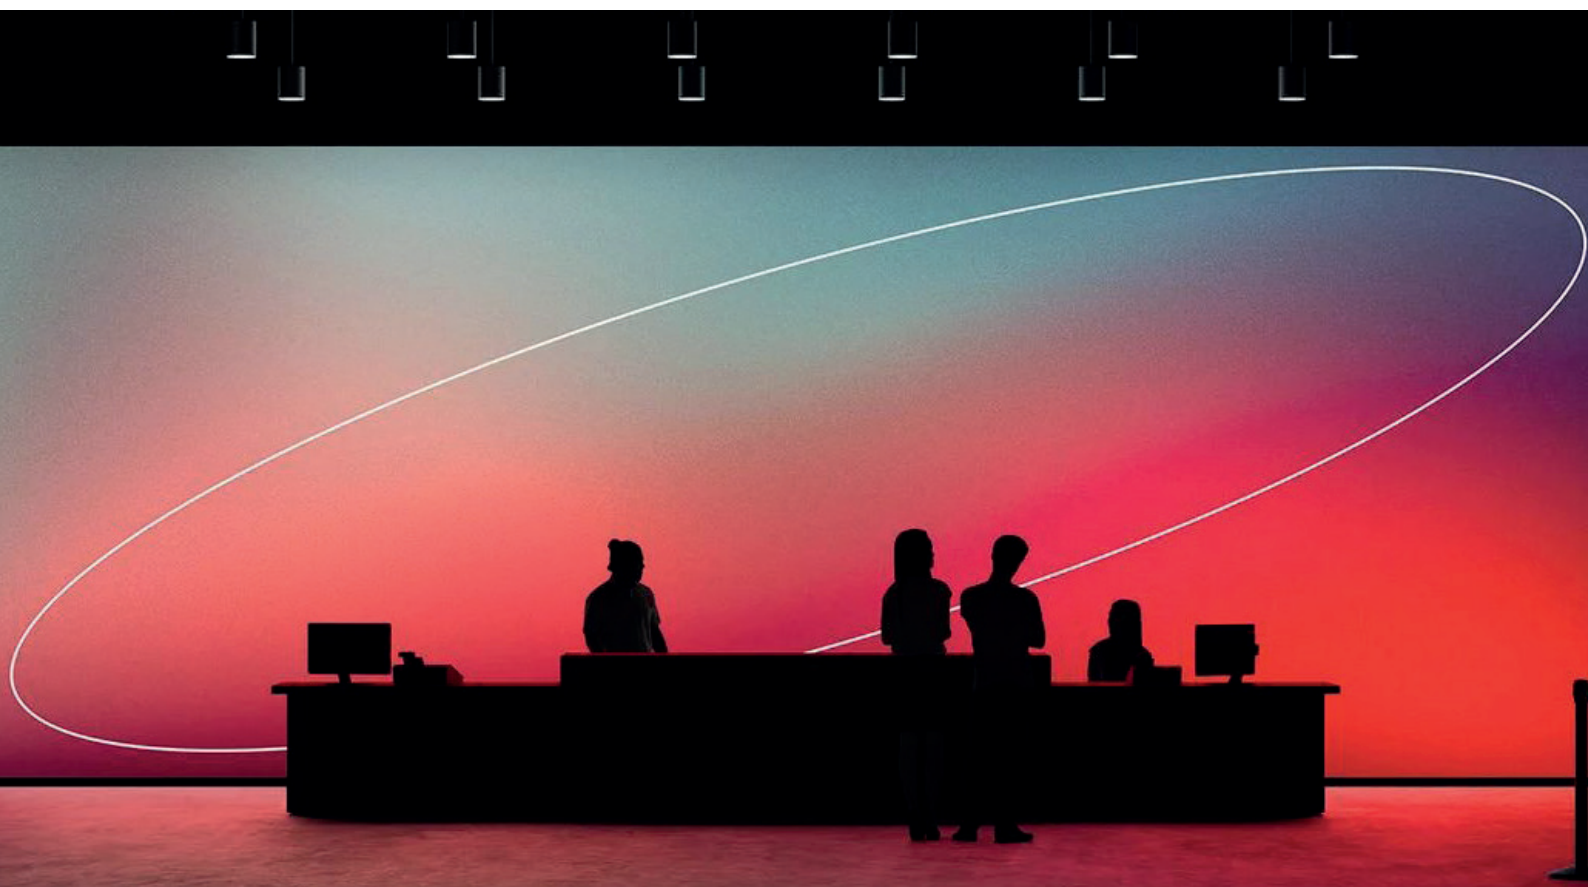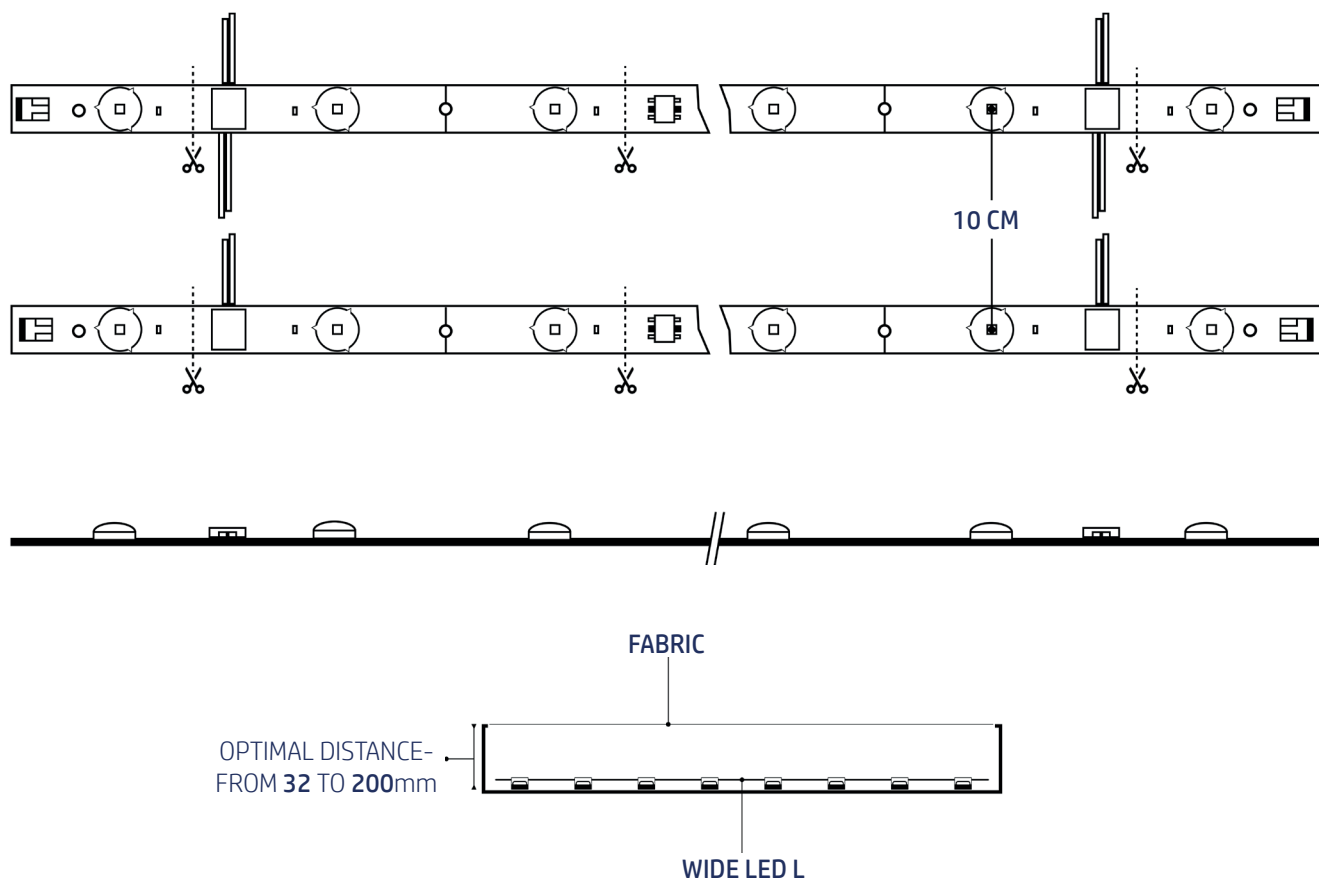

Product images are for reference only.
All specifications provided are not binding and may be subject to change without notice.

